



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 8 November 2004

BEST AVAILABLE COPY

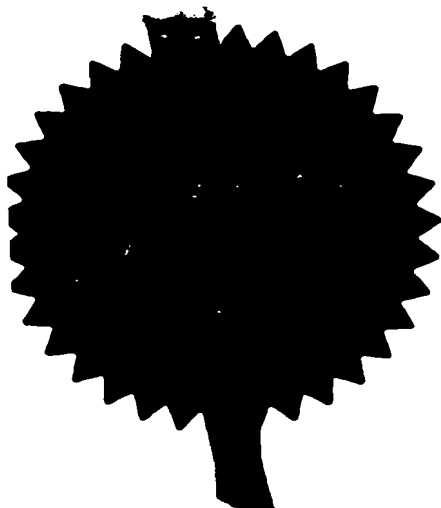

Patents Form 1/77Patents Act 1977
(Rule 16)

23 OCT 2003

Request for grant of a patent*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)*
 23 OCT 2003 14:51
 P01/7700 0.05-0324744.2
 23 OCT 2003 14:51
 P01/7700 0.05-0324744.2
The Patent OfficeCardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

ASIAMP13146GB

2. Patent application number

(The Patent Office will fill this part in)

0324744.2

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*ANDERGAUGE LIMITED
BADENTON INDUSTRIAL PARK
ABERDEEN
AB12 4YB
SCOTLAND
UNITED KINGDOMPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

04292876004

4. Title of the invention

RUNNING AND CEMENTING TUBING

5. Name of your agent *(if you have one)*"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*CRUIKSHANK & FAIRWEATHER
19 ROYAL EXCHANGE SQUARE
GLASGOW
G1 3AB
SCOTLAND
UNITED KINGDOMPatents ADP number *(if you know it)*

547002 ✓

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note 5)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

0083645 23-Oct-03 02:56

Patents Form 1/77

9. **Accompanying documents:** A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description

15

Claim(s)

Abstract

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

CRUIKSHANK & FAIRWEATHER

Date

23 OCTOBER 2003

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

ANDREW SHANKS

0141 221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direct prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date as the earlier UK application, you should also complete part 6 with the priority details.

0083645 23 OCT 03 02

Patents Form 1/

1

RUNNING AND CEMENTING TUBING

FIELD OF THE INVENTION

5 This invention relates to apparatus and methods for use in running tubing strings into drilled bores. Aspects of the invention also relate to cementing tubing in drilled bores.

BACKGROUND OF THE INVENTION

10 Bores drilled to access subterranean formations, and in particular hydrocarbon-bearing formations, are typically lined with metallic tubing, known as casing or liner. After the tubing is run into the bore, the annulus between the tubing and the surrounding bore wall is filled with cement slurry which sets to
15 seal the annulus to prevent, for example, flow of fluid through the annulus from a high pressure formation intersected by the bore into a lower pressure formation intersected by another portion of the bore.

 Casing and liner tend to be run into bores as strings of
20 conjoined tubing sections, which strings may be up to several thousand metres long. The outer diameter of the strings will be only slightly less than the bore inner diameter and thus, particularly in extended reach and highly deviated bores, there

2
may be considerable friction between the string and the bore
tending to resist movement of the string through the bore. Also,
deposits of loose material in the bore, ledges and doglegs may
all serve to hinder an attempt to run a tubing string into a
5 bore.

The end of the casing or liner string may be provided with
a shoe provided with cutting or reaming elements which serve,
through axial or rotational movement of the string, to dislodge,
rasp or cut through bore obstructions. However, it may prove
10 difficult to apply torque from surface to rotate such a shoe, as
the connectors between adjacent sections of the string are
generally not capable of withstanding any significant torque.

As noted above, once the tubing string is in place in the
bore cement slurry is run down through the tubing string and into
15 the annulus. This is achieved by pumping a slug of cement slurry
of appropriate volume from surface to the leading end of the
tubing, the cement slurry being isolated from other fluid in the
well by appropriate leading and trailing darts or plugs. To
achieve an effective cement seal between the tubing and the bore
20 wall it is important that the fluid and any other deposits in the
annulus are substantially completely displaced by the cement.
This may be facilitated by rotating the string as the cement is
pumped into the annulus, however as noted above it may be

3

difficult to apply the torque necessary to rotate the string from surface, due to the frictional forces acting between the string and the bore wall.

5 It is among the objectives of embodiments of the invention to facilitate running in of casing and liner strings and also to facilitate cementation of such strings and thus obviate or mitigate a number of the abovementioned difficulties.

SUMMARY OF THE INVENTION

10 According to a first aspect of the present invention there is provided a method of running a bore-lining tubing string into a bore, the method comprising running a tubing string into a bore while agitating the string to reduce the friction between the string and the bore wall.

15 Other aspects of the invention relate to apparatus for use in agitating a bore-lining tubing string.

The agitation or movement of the string as it is run into the bore has been found to facilitate the translation of the string into the bore, and is particularly useful in extended reach or highly deviated wells, and in running in the last string of bore-lining tubing into a bore. This may be due in part to the avoidance or minimising of static friction, to the relative movement induced between the string and the bore wall by the

20

4

agitation. Also, the movement of the string may also serve to prevent or minimise gellation of fluid in the well which is in contact with the string to and fluidise sediments lying on the low side of deviated bores.

5 The tubing string may be translated solely axially, or may also be rotated as it is advanced into the bore. In both cases the agitation of the string has been found to reduce the drag experienced by the string.

10 In some cases, the string may be provided with a drill bit, reaming shoe or other cutting structure tool at its leading end, primarily to remove or displace bore obstructions which would otherwise impede the progress of the tubing string through the bore. The rotation of the drill bit may be provided by means of a downhole motor or by rotation from surface. As noted above, 15 agitation of the string facilitates axial and rotational movement of the string in the bore and also allows for more effective transfer of weight to the drill bit: testing has demonstrated that, without agitation, typically only 10% of the weight applied to a tubing string is transferred to the string nose, whereas 20 with appropriate agitation 90% of the applied weight may be available at the nose, providing for far more effective cutting or reaming of bore obstructions.

5

Preferably the string is agitated by provision of an agitator in the string, and most preferably by provision of an agitator towards a leading end of the string. Alternatively, or in addition, one or more agitators may be provided at other locations in the string.

5

Preferably, the agitator is fluid actuated, and in particular may be actuated by fluid which is pumped through the tubing string. The actuating fluid may be conventional drilling fluid or "mud" or may be cement slurry or treating fluid. In a preferred embodiment the agitator is adapted to be actuated by both drilling fluid and cement slurry. Preferably, the fluid acts on a downhole motor, most preferably a positive displacement motor. This offers the advantage that the speed of the motor, and thus the rate of agitation, may be controlled by varying the fluid flow rate. Thus, the agitation frequency may be selected to suit local conditions and parameters, for example to match or to avoid a natural frequency of the string assembly.

10

15

Preferably, agitation is provided by means of an arrangement such as described in applicant's US Patent No. 6,508,317, the disclosure of which is incorporated by reference.

20

The preferred agitator form includes a valve element that is movable to vary the dimension of a fluid passage. Preferably, the fluid passage dimension controls flow of fluid through the

6

string, or at least a portion of the string, which fluid may be circulated down through the string and then up through the annulus between the string and the bore wall. Ideally, the fluid passage is never completely closed; rather the passage flow area is varied between a larger open area and a smaller open area, and most preferably includes a flow passage portion that remains open. The preferred agitator form provides positive pressure pulses in the fluid above the valve and negative pressure pulses in the fluid below the valve, that is the pressure in the fluid rises above the valve and falls below the valve as the flow passage area is restricted. Pressure pulses, and in particular positive pressure pulses, may act on a shock tool or the like which is arranged to axially extend and contract in response to the pressure pulses. The shock tool may be provided at any appropriate location in the tubing string but is preferably located above the agitator. In other embodiments the shock tool may be omitted.

Preferably, the agitator comprises a driven valve element. Thus the valve element is moved positively to vary the flow passage area. The valve element may be driven by any appropriate means but is preferably coupled to the rotor of a fluid driven motor, most preferably the rotor of a positive displacement motor. The rotor may provide rotational, transverse or axial

7

movement and, in a preferred embodiment, as described in US Patent No. 6,508,317, the rotor is of a Moineau principle motor and is directly coupled to the valve member and provides both rotational and transverse movement to the valve member. As noted
5 above, the frequency of pulses and thus of string agitation provided by a positive displacement motor-driven valve element is directly proportional to the fluid flow rate through the motor, and in addition in the preferred agitator form the pulse amplitude may also be controlled in this manner.

10 Preferably, the method further comprises cementing the tubing string in the bore while operating the agitator.

In preferred embodiments, the operation of the agitator will thus continue to agitate the tubing string and will also apply pressure pulses to the cement as it flows into and through
15 the annulus. The agitation of the string will facilitate movement or manipulation of the tubing string. This movement is believed to facilitate displacement of fluid and other deposits from the annulus and ensure uniform distribution of the cement through and around the annulus. In other embodiments the
20 movement of the tubing string induced by the agitation of the string may be sufficient to provide a similar effect. It is also believed that the application of pressure pulses to the cement, preferably negative pressure pulses in contrast to the positive

8

pressure pulses experienced above the agitator, and the pulsed advancement of the cement slurry through the annulus, will also assist in displacing material from the annulus ahead of the cement and in breaking up or dislodging any deposits in the annulus.

The preferred form of agitator has, surprisingly, been found to operate well with cement slurry as the actuating fluid and cement has been found to pass through the agitator without difficulty. One known difficulty experienced in handling cement slurry is known as flash setting, which typically occurs when cement slurry encounters a restriction and the particulates in the slurry bridge the restriction and then pack off and solidify. This can take place in a very short time span, and without warning, and is difficult if not impossible to remedy. Without wishing to be bound by theory it is believed that the preferred agitator form avoids this difficulty by one or more of the provision of a flow path which is never completely closed, the provision of a valve member which is positively driven by a motor, and the provision of a valve member which is moved transversely as well as rotated and thus prevents build up of particulates at the valve. However, it may still be preferred to provide for cement bypass above the agitator, such that in the event of a difficulty with the agitator the cement slurry may

9
pass directly into the annulus, without having to pass through
the agitator.

In certain embodiments the agitator may be adapted to
permit continued operation after the annulus has been filled with
5 cement, such that agitation of the string may be continued while
the cement cures. This may be achieved by providing a bypass
path such that fluid may be passed through the agitator following
the cement, but the fluid is not directed into the annulus.

The ability to vary one or more of the agitation frequency
10 and the amplitude of the pressure pulses allows the agitator to
be driven at a rate suitable for cementing, which may be
different from the rate best suited to running the tubing string
into the bore.

The apparatus of the various aspects of the invention may
15 be left in the bore following cementation. In this case, the
apparatus may be adapted to be drillable, such that it is
possible to drill the bore beyond the end of the tubing string.
In other cases the apparatus may be adapted to be soluble or part
soluble such that by passing an appropriate liquid into the bore
20 it is possible to dissolve or weaken the apparatus such that it
may be removed from the bore. In other aspects of the invention
the apparatus may be adapted to be retrievable, for example by

10
running the apparatus on a separate string or by
releasably mounting the apparatus in the tubing string.

It will be apparent to those of skill in the art that many
of the above features have utility separately of the first aspect
5 of the invention, and these features may form separate aspects of
the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the present invention will now
10 be described, by way of example, with reference to the
accompanying drawings, in which:

Figure 1 is a schematic illustration of a string of bore-
lining tubing incorporating apparatus in accordance with an
embodiment of the present invention;

15 Figure 2 is a sectional illustration of an agitator
assembly of the apparatus of Figure 1; and

Figure 3 is an enlarged sectional illustration of part of
the agitator assembly of Figure 2.

20 DETAILED DESCRIPTION OF THE DRAWINGS

Reference is first made to Figure 1 of the drawings, which
illustrates the leading end of a string of bore-lining tubing 10
incorporating apparatus 12 in accordance with an embodiment of

the present invention. In particular, the tubing is in the form of liner 10 intended to form the last lined section of a drilled bore 14 which has been drilled from surface to intersect a hydrocarbon-bearing formation.

5 The apparatus 12 comprises a shock sub 16, an agitator 18, a downhole motor 20 and a drill bit 22 and, as will be described, is used to facilitate running the liner string 10 into the bore 14 and then cementing the liner string 10 in the bore.

10 The drill bit 22 and downhole motor 20 are substantially conventional and are used in this embodiment to clear obstructions from the bore 14 as the string 10 is advanced through the bore. The motor is driven by drilling fluid which is pumped through the string 10 from surface, the fluid passing through jetting nozzles in the bit and then passing back to 15 surface through the annulus 30 between the string 10 and the bore wall.

The agitator 18, as shown in greater detail in Figures 2 and 3 of the drawings, includes an elongate tubular body having an upper motor section 32 and a lower valve section 34. The 20 motor section 32 accommodates a Moineau principle motor having a two lobe elastomeric stator 36 and a single lobe rotor 38. The valve section 34 accommodates first and second valve plates 40, 42, each defining a flow port 44, 46. The first valve plate 40

12
is directly mounted on the lower end of the rotor 38 via a
ported connector 48 defining flow passages 50 which provide fluid
communication between the variable geometry annulus defined
between the stator 36 and the rotor 38 and the flow port 44. The
5 second valve plate 42 is mounted on the valve section body 34
directly below the first valve plate 40 such that the respective
flow ports 44, 46 coincide. As the rotor 38 rotates, due to
fluid being pumped down through the motor section 32, the rotor
38 oscillates from side-to-side and this movement is transferred
10 directly to the valve plate 40 to provide a cyclic variation in
the flow area defined by the flow ports 44, 46.

The fluctuating fluid flow rate and fluid pressure pulses
produced by the operation of the valve are, in this embodiment,
used to operate the shock sub 16 positioned above the agitator
15 18. The shock sub 16 tends to extend in response to the positive
pressure pulses it experiences, and tends to retract between the
pulses. Furthermore, the pressure pulses are also transmitted
upwardly through the string 10. The action of the shock sub 16
and the pressure pulses agitate the string 10 in the bore 14,
20 facilitating translation of the string 10 through the bore 14.
The operation of the shock sub 16 and the pressure pulses acting
in the drilling fluid below the agitator 18 also provide a hammer
drill effect at the bit 22. Furthermore, it has been found that

the agitation of the string 10¹³ facilitates transfer of weight from surface to the bit 22, allowing the bit 22 to operate far more effectively.

Once the string 10 has been translated to the bottom of the bore 14, a slug of cement slurry is pumped down through the string 10, and then down through the apparatus 12. The slug of cement is isolated from other fluids by appropriate darts or plugs, the leading plug or dart incorporating a burst disc which bursts when the dart encounters the upper end of the apparatus 12, to allow the cement slurry to be pumped through the apparatus 12, out of the bit 22 and into the annulus 30. The agitator 18 is actuated by the flow of cement slurry such that the string 10 continues to be agitated by the passage of the slurry therethrough. This agitation provides a number of advantages.

Firstly, the agitation facilitates manipulation of the string 10 from surface, for example rotation of the string, which may be utilised to improve the distribution of cement through and around the annulus 30. The agitation also assists in maintaining the drilling fluid in the annulus 30 in a fluid state: some drilling fluids are formulated to gel if left undisturbed, and would be more difficult to displace from the annulus 30 if not maintained in a fluid state by the movement of the string 10. The agitation also fluidises deposits of drill cuttings and the like lying in

the annulus, and thus facilitates displacement of the
drill cuttings both during running in of the string 10 and during
cementation.

The operation of the agitator 18 also creates pressure
pulses in the cement slurry passing up through the annulus 30,
which pulses are also believed to assist in displacing drilling
fluid and any other deposits from the annulus 30.

The rate at which the cement slurry is pumped may be varied
to provide a desired frequency and amplitude of agitation,
selected to enhance the provision of an effective cement seal
around the string.

The configuration of the agitator 18 is such that blockages
within the agitator are unlikely to occur, however if desired a
bypass facility may be provided above the apparatus 12, such that
the cement slurry may be directed into the annulus 30 without
having to pass through the apparatus 12.

In this embodiment agitation of the string 10 will cease
when the annulus 30 is filled with the cement slurry. However,
in other embodiments a fluid bypass or the like may be provided
to permit the agitator to continue to operate, actuated by fluid
pumped into the bore after the cement slurry, and which fluid is
not directed into the annulus; the continued agitation of the

15
string 10 may be useful in achieving a better quality
cement seal.

In other embodiments the shock sub 16 may be omitted, the
variation in the drilling fluid and cement slurry flow rate
5 through the agitator, and the resulting pressure pulses, being
sufficient to provide the desired degree of movement of the
string 10.

The above-described embodiment is utilised in facilitating
running in and cementing the last section of bore-lining tubing;
10 the apparatus 12 remains in the bore 14 with the cemented string
10, and would prevent the bore being drilled beyond the end of
the string 10. Thus, as the apparatus is only a "single-use"
apparatus, and may therefore be constructed perhaps somewhat less
robustly than conventional downhole apparatus intended for
15 multiple uses. In other embodiments the apparatus 12 may be
retrievable, for example by mounting the apparatus on an inner
string within the liner string 10, such that the apparatus 12 may
be pulled out of the cemented liner 10. Alternatively, the
apparatus 12 may be drillable.

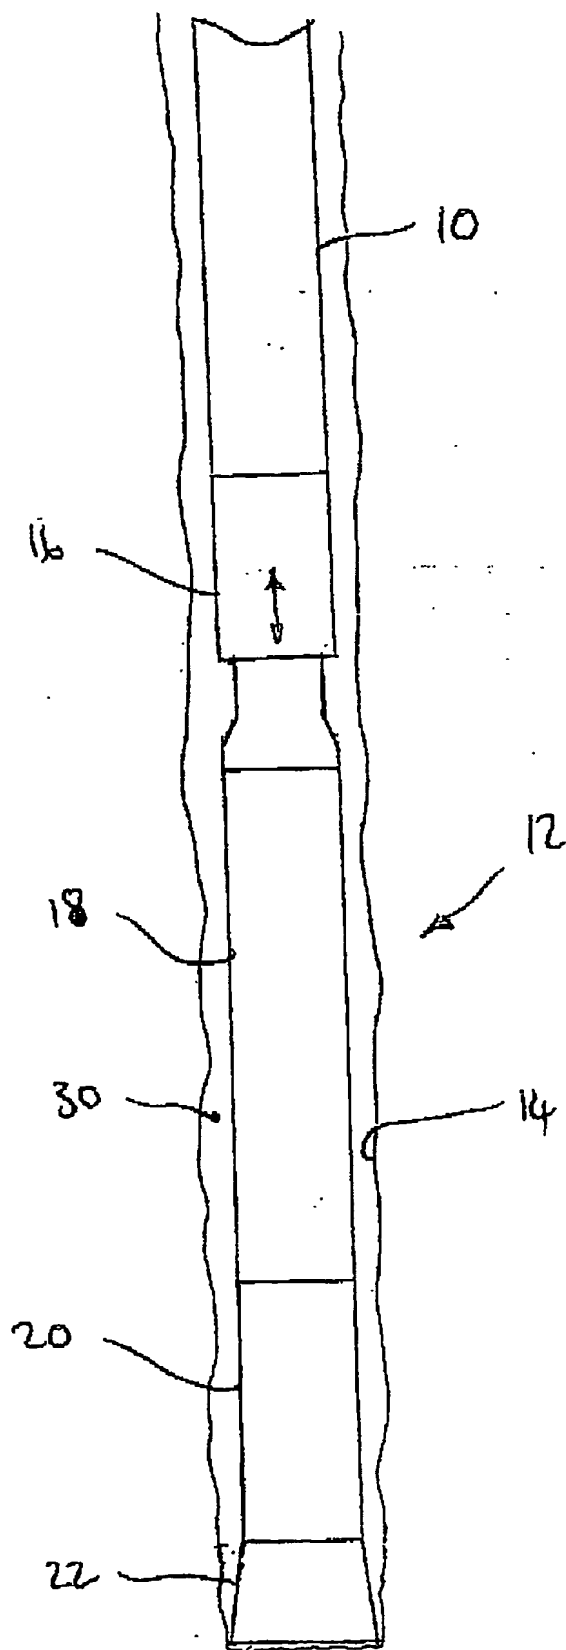


FIG 1

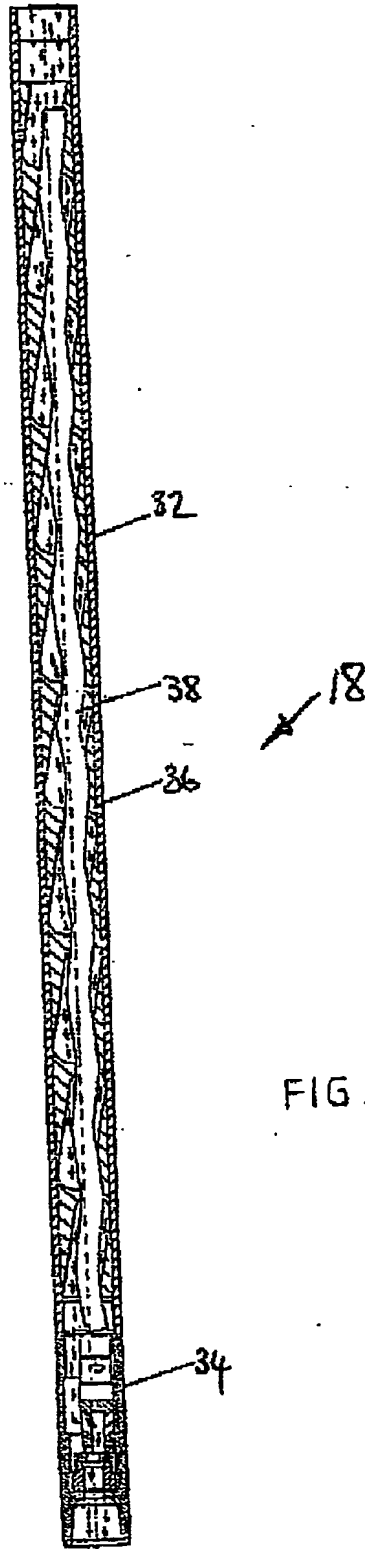


FIG. 2

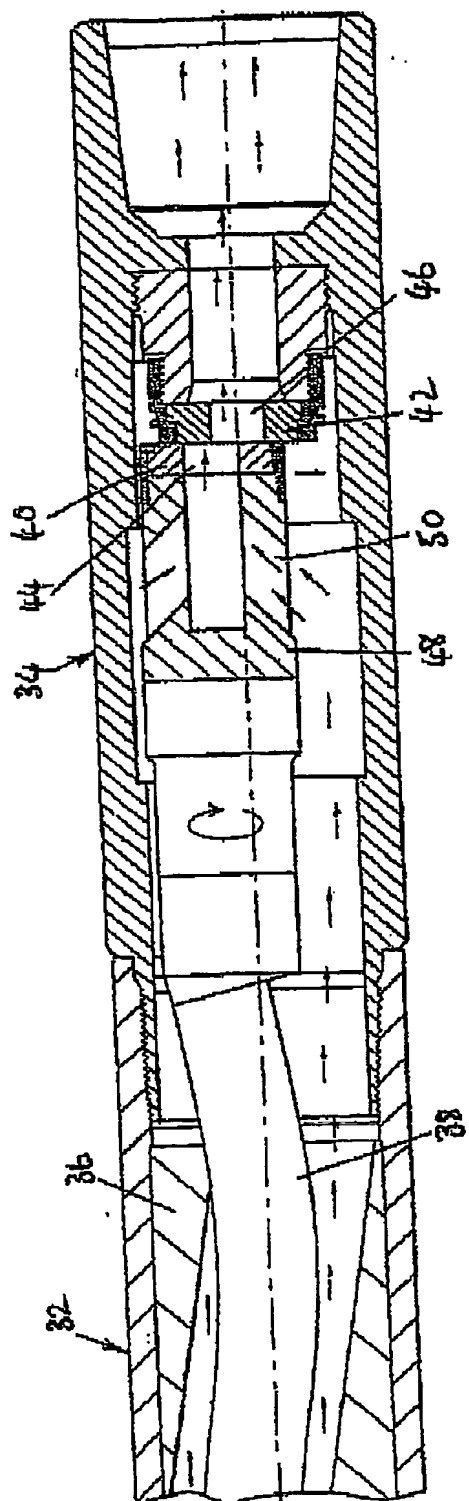


FIG 3

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/004503

International filing date: 25 October 2004 (25.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0324744.2
Filing date: 23 October 2003 (23.10.2003)

Date of receipt at the International Bureau: 19 November 2004 (19.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.